

FEATURES

- ▶ Small 57.9 x 36.8 x12.7 mm Package
- ▶ Input Ranges 43-101VDC or 66-160VDC
- ▶ Meets Railway Standard EN50155 (IEC751)
- ▶ Compliance to Railway EMC Standard EN50121-3-2
- ▶ High Efficiency up to 92%
- ▶ No Minimum Load Requirement
- ▶ Operating Temp. Range -40°C to +85°C max.
- ▶ Reinforced Insulation 3000 VACrms
- ▶ Under-Voltage Shutdown
- ▶ Remote On/Off
- ▶ UL/cUL/IEC/EN 60950-1 Safety Approval
- ▶ Metal Case with isolated Baseplate
- ▶ 3 Years Product Warranty


PRODUCT OVERVIEW

The MINMAX MTQZ75 series is a new generation of high performance, convection-cooled 75W dc-dc converters designed specifically for railway applications. They are available for the popular railway input voltages of either 72(43-101)VDC or 110(66-160)VDC.

The converters conform to railway industry transient standard EN50155 and complies also with EMC standard EN50121-3-2.

Advanced circuit topology provides a very high efficiency up to 92% which allows baseplate temperatures range up to +85°C. For improved heat dissipation the modules can be supplied with a heatsink. Further product features include high, reinforced insulation, remote On/Off control, under-voltage shutdown as well as overload and over-temperature protection.

Model Selection Guide

Model Number	Input Voltage (Range) VDC	Output Voltage VDC	Output Current		Input Current		Reflected Ripple Current mA(typ.)	Over Voltage Protection VDC	Max. capacitive Load µF	Efficiency (typ.) %
			Max. mA	@Max. Load mA(typ.)	@No Load mA(typ.)					
			@Max. Load %							
MTQZ75-72S05	72 (43 ~ 101)	5	15000	1170	50	35	6.2	25500	89	
MTQZ75-72S12		12	6250	1132	45		15	4400	92	
MTQZ75-72S15		15	5000	1132	45		18	2800	92	
MTQZ75-72S24		24	3125	1145	55		27	1100	91	
MTQZ75-110S05	110 (66 ~ 160)	5	15000	766	40	35	6.2	25500	89	
MTQZ75-110S12		12	6250	749	35		15	4400	91	
MTQZ75-110S15		15	5000	749	35		18	2800	91	
MTQZ75-110S24		24	3125	758	50		27	1100	90	

Input Specifications

Parameter	Model	Min.	Typ.	Max.	Unit
General	Input Specifications comply to				
Input Surge Voltage (100ms. max)	72V Input Models	-0.7	---	165	VDC
	110V Input Models	-0.7	---	250	
Start-up Threshold Voltage	72V Input Models	---	---	43	
	110V Input Models	---	---	66	
Undervoltage Shutdown Voltage	72V Input Models	---	40	---	
	110V Input Models	---	63	---	
Start-up Time	All Models	---	0.35	---	S
Input Filter		Internal Pi Network			
		(for EN55011, class A and FCC level A Compliance See Page 6)			

Output Specifications

Parameter	Conditions	Min.	Typ.	Max.	Unit	
Output Voltage Setting Accuracy	Full Load and Nominal Vin	---	---	±1.0	%	
Line Regulation	Vin=Min. to Max. @ Full Load	---	---	±0.2	%	
Load Regulation	Min. Load to Full Load	---	---	±0.3	%	
Min.Load	No minimum Load Requirement					
Ripple & Noise	0-20 MHz Bandwidth	24V Output	---	---	150 (see Note 3)	mV _{P-P}
		Other Output	---	---	100 (see Note 3)	mV _{P-P}
Transient Recovery Time	25% Load Step Change (2)	---	250	---	µsec	
Transient Response Deviation		---	±3	±5	%	
Temperature Coefficient		---	---	±0.02	%/°C	
Over Load Protection	Current Limitation at 150% typ. of Iout max., Hiccup					
Short Circuit Protection	Hiccup Mode 0.3Hz typ.					

General Specifications

Parameter	Conditions	Min.	Typ.	Max.	Unit
I/O Isolation Voltage (60 sec.)	reinforced insulation	3000	---	---	VACrms
Isolation Voltage Input/Output to case		1500	---	---	VDC
I/O Isolation Resistance	500 VDC	1000	---	---	MΩ
I/O Isolation Capacitance	100KHz, 1V	---	---	3000	pF
Vibration and thermal shock	EN 61373				
Switching Frequency		---	320	---	KHz
MTBF(calculated)	MIL-HDBK-217F@25°C Full Load, Ground Benign	143,800	---	---	Hours
Safety Standards	cUL/UL 60950-1, IEC/EN 60950-1, IEC/EN 50155				

Remote On/Off Control

Parameter	Conditions	Min.	Typ.	Max.	Unit
Converter On	3.5V ~ 12V or Open Circuit				
Converter Off	0V ~ 1.2V or Short Circuit				
Control Input Current (on)	Vctrl = 5.0V	---	0.5	---	mA
Control Input Current (off)	Vctrl = 0V	---	-0.5	---	mA
Control Common	Referenced to Negative Input				
Standby Input Current	Nominal Vin	---	2.5	---	mA


Output Voltage Trim

Parameter	Conditions	Min.	Typ.	Max.	Unit
Trim Up / Down Range (See Page 6)	% of Nominal Output Voltage	±10	---	---	%


Environmental Specifications					
Parameter	Model	Min.	Max.		Unit
			without Heatsink	with Heatsink	
Operating Temperature Range Natural Convection ⁽⁸⁾ Nominal Vin, Load 100% Inom. (for Power Derating see relative Derating Curves)	MTQZ75-72S12, MTQZ75-72S15	-40	56	61	°C
	MTQZ75-72S24		49	55	
	MTQZ75-110S12, MTQZ75-110S15		43	48	
	MTQZ75-110S24 MTQZ75-72S05, MTQZ75-110S05		36	42	
Thermal Impedance	Natural Convection without Heatsink	7.5	---	---	°C/W
	Natural Convection with Heatsink	6.8	---	---	
	100LFM Convection without Heatsink	6.1	---	---	
	100LFM Convection with Heatsink	4.1	---	---	
	200LFM Convection without Heatsink	5.3	---	---	
	200LFM Convection with Heatsink	3.3	---	---	
	400LFM Convection without Heatsink	3.9	---	---	
	400LFM Convection with Heatsink	2.2	---	---	
Base-plate Temperature Range		-40	+105		°C
Over Temperature Protection (Base Plate)		---	+110		°C
Storage Temperature Range		-50	+125		°C
Cooling Test	Compliance to IEC/EN60068-2-1				
Dry Heat	Compliance to IEC/EN60068-2-2				
Damp Heat	Compliance to IEC/EN60068-2-30				
Shock & Vibration Test	Compliance to IEC/EN 61373				
Operating Humidity (non condensing)		5	95		% rel. H
Lead Temperature (1.5mm from case for 10Sec.)		---	260		°C

EMC Specifications		
Parameter	Standards & Level	Performance
General	Compliance with EN50121-3-2 Railway Applications	
EMI Emissions	EN55011, Class A	see Page 6
ESD Immunity	EN61000-4-2 air ±8KV , contact ±6KV	Perf. Criteria A
Radiated Immunity	EN61000-4-3 10V/m	Perf. Criteria A
Fast Transients	EN61000-4-4 ±2KV	Perf. Criteria A*
Surge ⁽⁷⁾	EN61000-4-5 ±1KV	Perf. Criteria A*
Conducted Immunity	EN61000-4-6 10V/rms	Perf. Criteria A


*see Page 4, Note 8

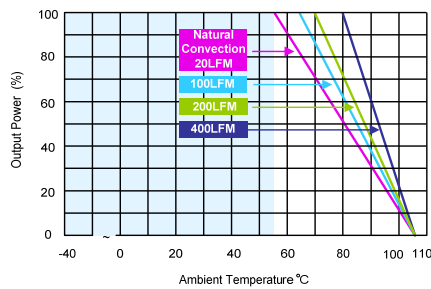Power Derating Curve


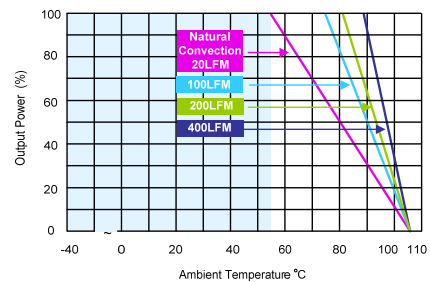
MTQZ75-72S12, MTQZ75-72S15 Derating Curve without Heatsink

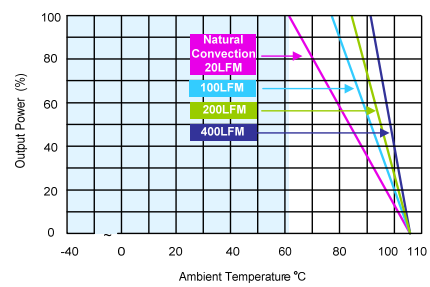


MTQZ75-72S12, MTQZ75-72S15 Derating Curve with Heatsink

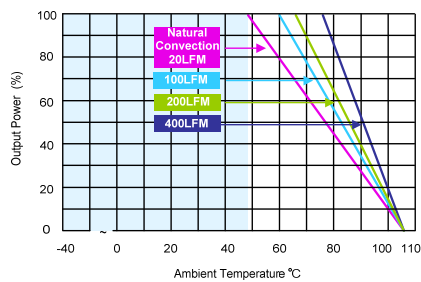


MTQZ75-110S12, MTQZ75-110S15, MTQZ75-72S24 Derating Curve without Heatsink




MTQZ75-110S12, MTQZ75-110S15, MTQZ75-72S24 Derating Curve with Heatsink

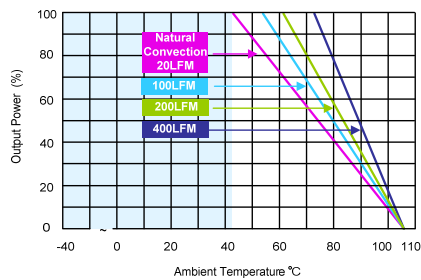


MTQZ75-110S24 Derating Curve without Heatsink

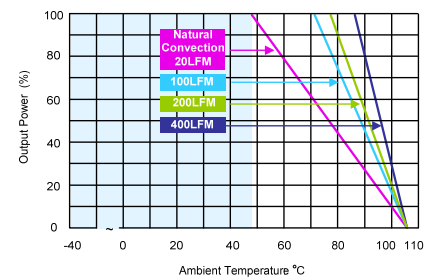

MTQZ75-110S24 Derating Curve with Heatsink

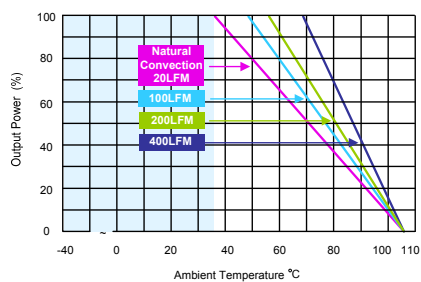


MTQZ75-72S05, MTQZ75-110S05 Derating Curve without Heatsink

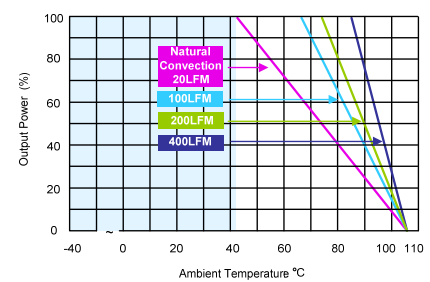

MTQZ75-72S05, MTQZ75-110S05 Derating Curve with Heatsink

Notes

- 1 Specifications typical at $T_a = +25^\circ\text{C}$, resistive load, nominal input voltage and rated output current unless otherwise noted.
- 2 Transient recovery time is measured to within 1% error band for a step change in output load of 75% to 100%.
- 3 Ripple & Noise measurement with a $1\mu\text{F}$ MLCC and a $10\mu\text{F}$ Tantalum Capacitor.
- 4 Other input and output voltage may be available, please contact factory.
- 5 To order the converter with heatsink, please add a **suffix -HS** (e.g. MTQZ75-72S05-HS) to order code.
- 6 Part number for heat sink MT-HS1.
- 7 The MTQZ75 series can meet EN61000-4-4 & EN61000-4-5 by adding a capacitor across the input pins. Suggested capacitor: CHEMI-CON KXG 470 μF /200V.
- 8 If remote sense not used, the +sense should be connected to +output and -sense should be connected to -output.
- 9 That "natural convection" is about 20LFM but is not equal to still air (0 LFM).
- 10 Specifications are subject to change without notice.

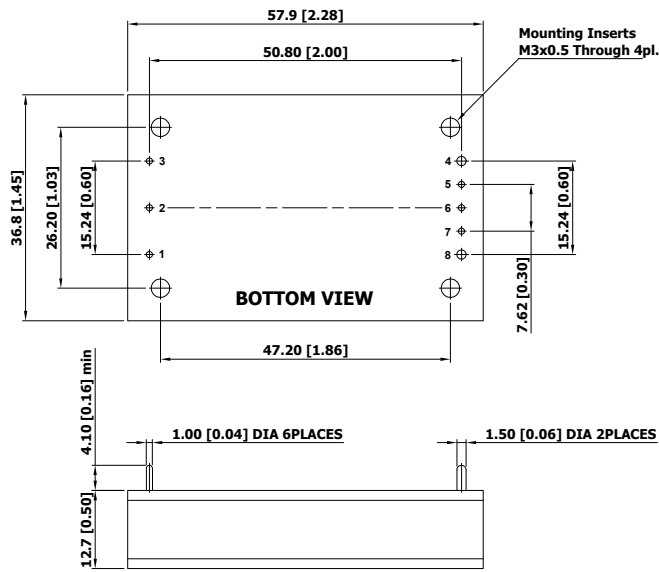
Package Specifications
Mechanical Dimensions

Pin Connections

Pin	Function
1	+Vin
2	Remote On/Off
3	-Vin
4	-Vout
5	-Sense ₍₈₎
6	Trim
7	+Sense ₍₈₎
8	+Vout

- ▶ All dimensions in mm (inches)
- ▶ Tolerance: X.XX±0.5 (X.XX±0.02)
X.XX±0.25 (X.XXX±0.01)
- ▶ Pin diameter $\phi 1.0 \pm 0.05$ (0.04±0.002)
- ▶ Pin diameter $\phi 1.5 \pm 0.05$ (0.06±0.002)

Physical Characteristics

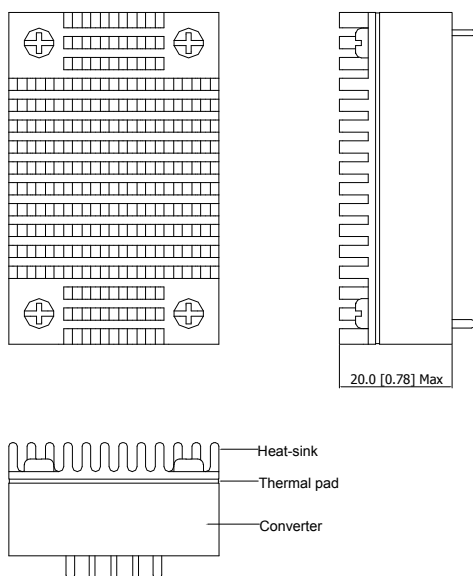
Case Size	: 57.9x36.8x12.7 mm (2.28x1.45x0.5 inches)
Case Material	: Aluminum Frame with Black Anodized Coating
Top Side Base Material	: Aluminum Plate
Bottom Side Base Material	: Non-conductive Black Plastic Base Plate
Potting Material	: Epoxy (UL94-V0)
Weight	: 61g

Heatsink (Option -HS)

Physical Characteristics

Heatsink Material	: Aluminum
Finish	: Black Anodized Coating
Weight	: 13g

▶ The advantages of adding a heatsink are:

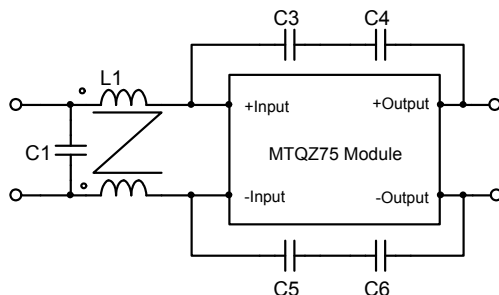
1. To improve heat dissipation and increase the stability and reliability of the DC/DC converters at high operating temperatures.
2. To increase operating temperature of the DC/DC converter, please refer to Derating Curve.

Recommended Filter for EN 55011&55022, class A ; FCC part 15 ,level A Compliance


Model Type	L1	C1	C3	C4	C5	C6
MTQZ75-72SXX	450μH/450μH	CHEMI-CON KXG Series	2200pF	2200pF	2200pF	2200pF
MTQZ75-110SXX		68μF/200V	3KV	3KV	3KV	3KV

External Output Trimming

Output can be externally trimmed by using the method shown below

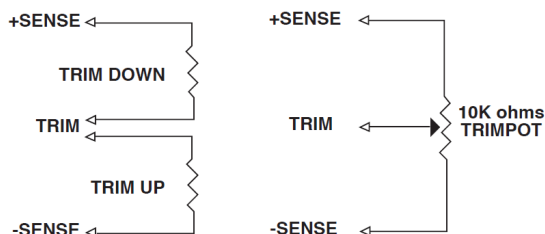

MTQZ75-XXS05 Trim Table

Trim down	1	2	3	4	5	6	7	8	9	10	%
Vout=	Vox0.99	Vox0.98	Vox0.97	Vox0.96	Vox0.95	Vox0.94	Vox0.93	Vox0.92	Vox0.91	Vox0.90	Volts
Rd=	45.53	20.61	12.31	8.15	5.66	4.00	2.81	1.92	1.23	0.68	KOhms
Trim up	1	2	3	4	5	6	7	8	9	10	%
Vout=	Vox1.01	Vox1.02	Vox1.03	Vox1.04	Vox1.05	Vox1.06	Vox1.07	Vox1.08	Vox1.09	Vox1.10	Volts
Ru=	36.57	16.58	9.92	6.59	4.59	3.25	2.30	1.59	1.03	0.59	KOhms

MTQZ75-XXS12 Trim Table

Trim down	1	2	3	4	5	6	7	8	9	10	%
Vout=	Vox0.99	Vox0.98	Vox0.97	Vox0.96	Vox0.95	Vox0.94	Vox0.93	Vox0.92	Vox0.91	Vox0.90	Volts
Rd=	394.50	179.74	106.08	68.86	46.39	31.36	20.60	12.51	6.21	1.17	KOhms
Trim up	1	2	3	4	5	6	7	8	9	10	%
Vout=	Vox1.01	Vox1.02	Vox1.03	Vox1.04	Vox1.05	Vox1.06	Vox1.07	Vox1.08	Vox1.09	Vox1.10	Volts
Ru=	368.92	161.92	94.97	61.86	42.12	29.00	19.66	12.66	7.23	2.89	KOhms

MTQZ75-XXS15 Trim Table

Trim down	1	2	3	4	5	6	7	8	9	10	%
Vout=	Vox0.99	Vox0.98	Vox0.97	Vox0.96	Vox0.95	Vox0.94	Vox0.93	Vox0.92	Vox0.91	Vox0.90	Volts
Rd=	572.67	248.63	145.60	94.97	64.87	44.92	30.72	20.10	11.86	5.28	KOhms
Trim up	1	2	3	4	5	6	7	8	9	10	%
Vout=	Vox1.01	Vox1.02	Vox1.03	Vox1.04	Vox1.05	Vox1.06	Vox1.07	Vox1.08	Vox1.09	Vox1.10	Volts
Ru=	392.98	182.12	108.73	71.43	48.85	33.71	22.86	14.69	8.33	3.23	KOhms


MTQZ75-XXS024 Trim Table

Trim down	1	2	3	4	5	6	7	8	9	10	%
Vout=	Vox0.99	Vox0.98	Vox0.97	Vox0.96	Vox0.95	Vox0.94	Vox0.93	Vox0.92	Vox0.91	Vox0.90	Volts
Rd=	512	229.6	138.3	90.3	60.7	42.4	29.04	18.67	11.09	4.78	KOhms
Trim up	1	2	3	4	5	6	7	8	9	10	%
Vout=	Vox1.01	Vox1.02	Vox1.03	Vox1.04	Vox1.05	Vox1.06	Vox1.07	Vox1.08	Vox1.09	Vox1.10	Volts
Ru=	574	256.9	149.6	96.5	64.7	43.28	27.68	16.72	7.68	1.11	KOhms

Test Setup


Input Reflected-Ripple Current Test Setup

Input reflected-ripple current is measured with an inductor L_{in} (4.7 μ H) and C_{in} (220 μ F, ESR < 1.0 Ω at 100 KHz) to simulate source impedance. Capacitor C_{in} , offsets possible battery impedance. Current ripple is measured at the input terminals of the module, measurement bandwidth is 0-500 KHz.

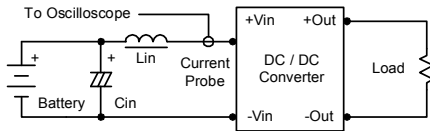

Peak-to-Peak Output Noise Measurement Test

Use a 1 μ F ceramic capacitor and a 10 μ F tantalum capacitor. Scope measurement should be made by using a BNC socket, measurement bandwidth is 0-20 MHz. Position the load between 50 mm and 75 mm from the DC/DC Converter.

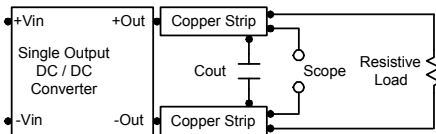

Technical Notes

Remote On/Off

Positive logic remote on/off turns the module on during a logic high voltage on the remote on/off pin, and off during a logic low. To turn the power module on and off, the user must supply a switch to control the voltage between the on/off terminal and the -Vin terminal. The switch can be an open collector or equivalent. A logic low is 0V to 1.2V. A logic high is 3.5V to 12V. The maximum sink current at the on/off terminal (Pin 2) during a logic low is -500 μ A.

Overcurrent Protection


To provide hiccup mode protection in a fault (output overload) condition, the unit is equipped with internal current limiting circuitry and can endure overload for an unlimited duration.

Overvoltage Protection

The output overvoltage clamp consists of control circuitry, which is independent of the primary regulation loop, that monitors the voltage on the output terminals. The control loop of the clamp has a higher voltage set point than the primary loop. This provides a redundant voltage control that reduces the risk of output overvoltage. The OVP level can be found in the output data.

Output Ripple Reduction

A good quality low ESR capacitor placed as close as practicable across the load will give the best ripple and noise performance. To reduce output ripple, it is recommended to use 4.7 μ F capacitors at the output.

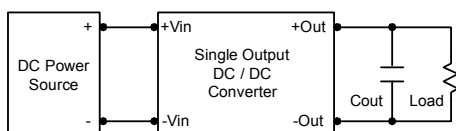

Maximum Capacitive Load

The MTQZ75 series has limitation of maximum connected capacitance at the output. The power module may be operated in current limiting mode during start-up, affecting the ramp-up and the startup time. The maximum capacitance can be found in the data sheet.

Thermal Considerations

Many conditions affect the thermal performance of the power module, such as orientation, airflow over the module and board spacing. To avoid exceeding the maximum temperature rating of the components inside the power module, the case temperature must be kept below 105 $^{\circ}$ C. The derating curves are determined from measurements obtained in a test setup.

