

FEATURES

- ▶ Fully encapsulated Plastic Case
- ▶ 3 Mounting Versions:
 - PCB Mounting with Solder Pins
 - Chassis Mounting with Screw Terminals
 - DIN-Rail Mounting
- ▶ Package Dimension 88.9x67.5x34.2 mm (PCB Version)
- ▶ Universal Input 85-264VAC, 47-440 Hz
- ▶ Protection Class II
- ▶ Extended Operating Temp.Range -40°C to +60°C at full Load
- ▶ LED Output Indicator (Chassis Version Models)
- ▶ Eco Design, compliant to Energy Star specification and ErP Directive 2009/125/EC
- ▶ Industrial Safety to UL/IEC/EN 90650-1 and UL508
- ▶ Medical Safety Approval to UL/IEC/EN 60601-1 3rd Edition
- ▶ Over Load and Over Temperature Protection
- ▶ 3 Year Product Warranty



PRODUCT OVERVIEW

The new MINMAX AYM-60 series is a range of fully encapsulated AC/DC power modules. These high performance products feature an extended operating temperature range of -40°C to +80°C. Universal input voltage 85-264VAC and UL/IEC/EN safety approvals including medical safety and UL508 listing qualify these power supplies modules for applications in products with worldwide markets. The modules comply with the latest European ErP Directive and meet Energy Star requirements. EMI-filter meets EN55022, class B and FCC, part15, class B.

The AYM-60 series power modules provide an economical solution for many space critical applications in commercial, medical and industrial electronic equipment.

Model Selection Guide

Model Number PCB Mounting (For model with Chassis Mounting, add suffix C)	Output Voltage VDC	Output Current Max. mA	Input Current		Max. capacitive Load µF	Efficiency (typ.) @Max. Load, 115VAC %
			115VAC, 60Hz	230VAC, 50Hz		
			@Max. Load mA(typ.)			
AYM-60S051	5.1	10000	859	516	8000	86
AYM-60S12	12	5000	1000	600	3900	87
AYM-60S15	15	4000	1000	600	3300	87
AYM-60S24	24	2500	1000	600	1500	87
AYM-60S48	48	1250	1000	600	680	87

Input Specifications

Parameter	Model	Min.	Typ.	Max.	Unit
AC Voltage Input Range	All Models	85	---	264	VAC
Input Frequency Range		47	---	440	Hz
DC Voltage Input Range		120	---	370	VDC
No-Load Power Consumption		---	<0.5	---	W
Inrush Current (Cold Start at 25°C)	115VAC	---	---	30	A
	230VAC	---	---	50	A

Output Specifications

Parameter	Conditions	Min.	Typ.	Max.	Unit
Output Voltage Accuracy		---	±1.0	±2.0	%
Line Regulation	Vin=Min. to Max.	---	±0.2	±1.0	%
Load Regulation	Iout=Min. to Max.	---	±0.5	±1.0	%
Min.Load	No minimum Load Requirement				
Ripple & Noise (20MHz)	5.1VDC Output Models	---	2.0	3.0	%V _{PP} of Vo
	Other Output Models	---	1.0	1.5	%V _{PP} of Vo
Over Voltage Protection	Zener diode clamp	---	120	---	% of Vo
Temperature Coefficient		---	±0.02	---	%/°C
Overshoot		---	---	5	%
Current Limitation	85VAC, Hiccup Mode, auto-recovery	105	---	---	%I _{nom.}
Short Circuit Protection	Hiccup mode, indefinite (automatic recovery) (long term overload condition may cause damage)				

General Specifications

Parameter	Conditions	Min.	Typ.	Max.	Unit
I/O Isolation Voltage (reinforced)		4000	---	---	VACrms
Leakage Current		---	80	---	μA
I/O Isolation Resistance	500 VDC	1000	---	---	MΩ
Switching Frequency		---	100	---	KHz
Hold-up Time	115VAC, 60Hz	---	20	---	ms
	230VAC, 50Hz	---	80	---	ms
MTBF (calculated)	MIL-HDBK-217F@25°C, Ground Benign	125,000	---	---	Hours
EMC Emission	Conducted and radiated	EN 55011 class B, EN 55022 class B, FCC part 15 class B			
EMC Immunity according EN61000-6-1	Standard	Specification Requirement			Performance Criteria
	EN61000-4-2	Air ±8KV Cont. ±4KV			B
	EN61000-4-3	80~1000MHz, 10V/m 80% AM, 1KHz modulation			A
	EN61000-4-4	AC port ±2KV DC, SL, TL ±2KV not less than 1 min.			B
	EN61000-4-5	1.2/50μS(8/20μS) AC dif. ±2KV DC ±1KV			B
	EN61000-4-6	0.15~80MHz, 10Vrms (functional earth ports included) 80% AM, 1KHz modulation			B
	EN61000-4-8	50Hz/60Hz, 30A/m			A
EN61000-4-11	30%, 10ms			B	
	60%, 100ms, 95%, 5000ms			C	
Protection Class II	According IEC/EN 60536				
Safety (Approvals pending)	IEC/EN 60950-1, 60601-1 3 rd , 2XMOPP cUL/UL 60950-1, 60601-1 3 rd , 2XMOPP, UL 508 listed				

Input Fuse

All Models	
External Fuse (Recommended)	3A Slow – Blow Type

Environmental Specifications

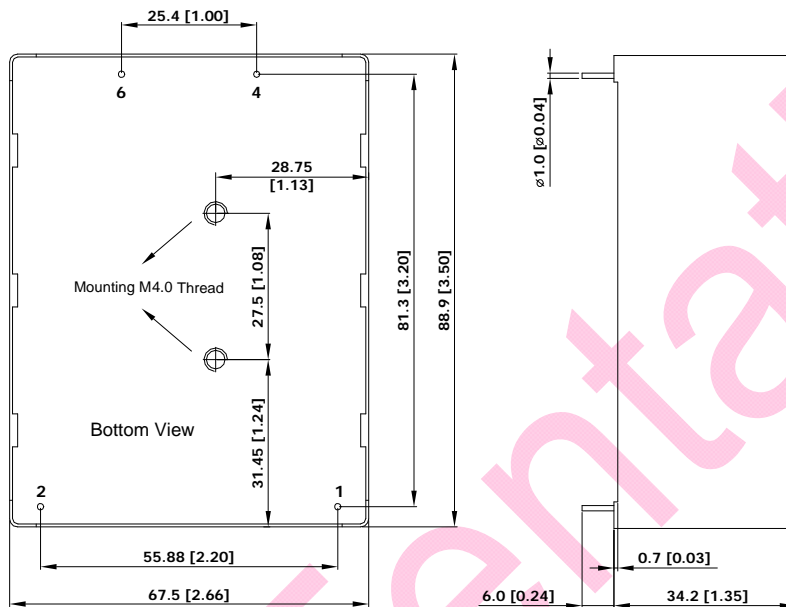
Parameter	Conditions	
Temperature Range (operational)	Ambient	-40°C to +80°C
Power Derating	Above +60°C	2.3W / °C
Storage Temperature Range		-40°C to +95°C
Over Temperature Protection	Shutdown at 90°C (automatic recovery at approx. 67°C)	
Humidity (non condensing)		95% rel. H
Cooling	Free-Air convection	

Notes

- 1 **This product is not designed for use in critical life support systems, equipment used in hazardous environment, nuclear control systems or other such applications which necessitate specific safety and regulatory standards other the ones listed in this datasheet.**
- 2 Specifications typical at Ta=+25°C, resistive load, 115VAC, 60Hz input voltage, after warm-up time rated output current unless otherwise noted.
- 3 Ripple & Noise measurement bandwidth is 0~20 MHz.
- 4 Safety approvals cover frequency 47-63 Hz.
- 5 All AC/DC modules should be externally fused at the front end for protection.
- 6 Other input and output voltage may be available, please contact factory.
- 7 To order the module with chassis mount package, please add a **suffix C** (e.g. AYM-60S12C).
- 8 Part number for DIN-Rail mounting bracket: **AC-DIN-02**
- 9 That "natural convection" is about 20LFM but is not equal to still air (0 LFM).
- 10 Specifications are subject to change without notice.

Package Specifications PCB Mounting

Mechanical Dimensions



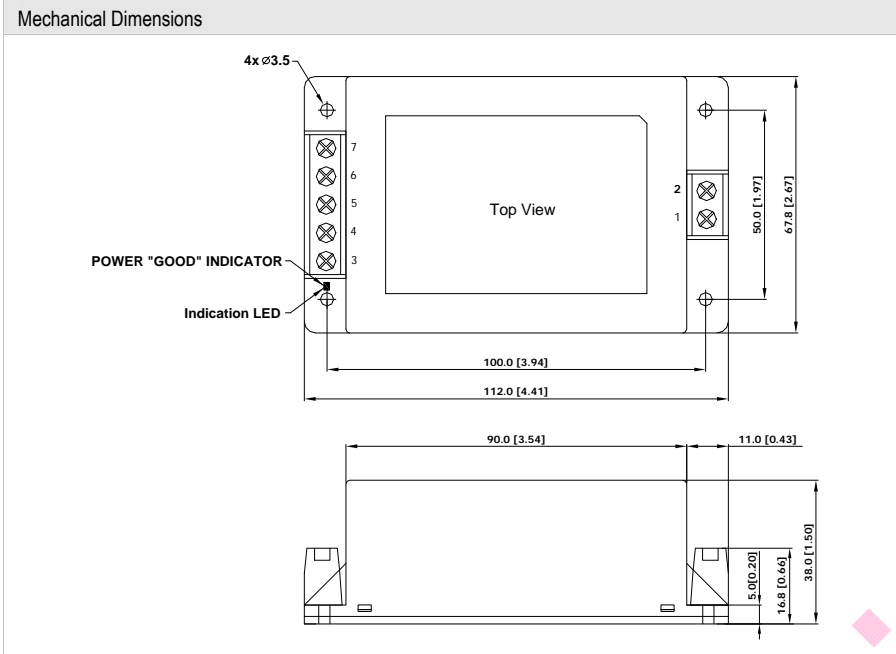
Pin Connections

Pin	Function
1	AC (N)
2	AC (L)
3	No Pin
4	+Vout
5	No Pin
6	-Vout
7	No Pin

- ▶ All dimensions in mm (inches)
- ▶ Tolerance: ± 0.5 (± 0.02)
- ▶ Pin diameter $\varnothing 1.0 \pm 0.1$ (0.04 ± 0.004)

Physical Characteristics

Case Size	: 88.9x67.5x34.2mm (3.50x2.66x1.35 inches)
Case Material	: Plastic resin + Fiberglass (flammability to UL 94V-0 rated)
Pin Material	: Copper Alloy with Gold Plate Over Nickel Subplate
Weight	: TBD

Package Specifications Chassis Mounting (order code suffix C)


Connections

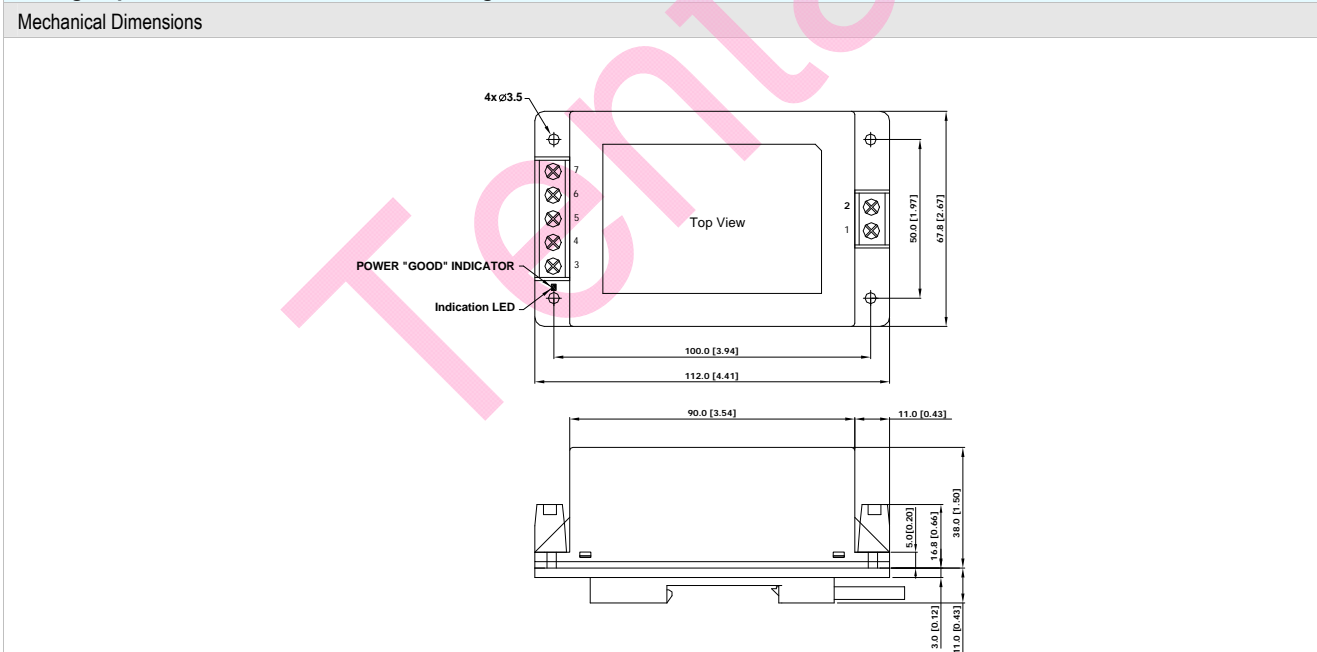
Pin	Function
1	AC (N)
2	AC (L)
3	NC
4	+Vout
5	NC
6	-Vout
7	NC

NC: No Connection

- ▶ All dimensions in mm (inches)
- ▶ Tolerance: ± 0.5 (± 0.02)

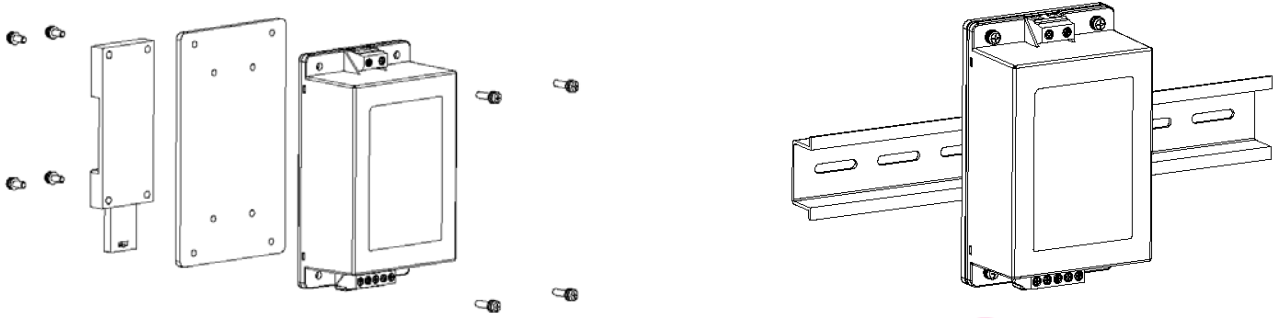
Physical Characteristics

Case Size	: 112.0x67.8x38.0mm (4.41x2.67x1.50 inches)
Case Material	: Plastic resin + Fiberglass (flammability to UL 94V-0 rated)
Weight	: TBD

Package Specifications with DIN Rail Mounting Bracket

Physical Characteristics

Case Size	: 112.0x67.8x38.0mm (4.41x2.67x1.50 inches)
Case Material	: Plastic resin + Fiberglass (flammability to UL 94V-0 rated)
Weight	: TBD

DIN-Rail Mounting Bracket (Order Code for Kit : AC-DIN-02)



Tentative