

HBU32 series

30W Open frame type switching power supplies for Medical Equipment



The HBU32 series of compact, open frame constructed, AC/DC switching mode power supplies provide 30 Watts of continuous output power .They are suited for use in Health care applications. All models meet FCC Part-18 class B and CISPR-11 EN55011 class B emission Limits and are designed to comply with UL/c-UL(UL 60601-1:3rdEdition) , TUV/T-mark(EN 60601-1:3rdEdition) and new CE requirements. All units are 100% burned in and tested.



Features

Wide Operating Voltage 80 to 275 VAC, 47 to 63 Hz

Input connector mates with Molex housing 09-50-3031 and Molex 2478 series crimp terminal

Output connector mates with Molex housing 09-50-3041 and Molex 2478 series crimp terminal

Single Output

Size: 1.5"x4"x0.84"

Class II

Medical Safety 3rd (EN60601-1 3rd Edition)

Input to Output : 2MOPP

3 year warranty

Specification & safety report



Data



CB



UL (NOA)



CE



FCC



TUV T-mark

Sheet (HBU32)

Electrical characteristics

Efficiency: 85% typ.

Line Regulation: 1% max.

Load Regulation: 5% max.

Hold-up Time: 12mS min.

Output ripple and noise: 1% (max).

Environmental

Operating Temperature: -10 to 70°C


Derate linearly from 100% load at 40°C to 50% load at 70°C

Storage Temperature: -40~85°C

Operating Humidity : 0~95%

Storage Humidity: 0~95%

MTBF: 100,000 calculated hours

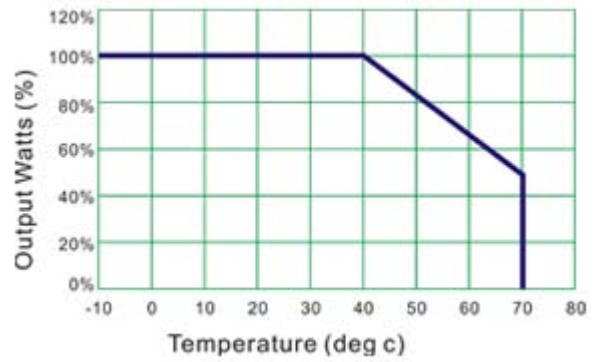

Model No.	Output Voltage	Max. Output Current	Total Regulation	Max. Output Power	Certificate
> HBU32-102	5 ~ 6 VDC	4.00 ~ 3.33 A	5%	20W	UL/cUL, CE, CB, FCC, TUV T-mark, RoHS2
> HBU32-103	6 ~ 8 VDC	3.83 ~ 2.87 A	5%	23W	UL/cUL, CE, CB, FCC, TUV T-mark, RoHS2
> HBU32-104	8 ~ 11 VDC	3.37 ~ 2.45 A	5%	27W	UL/cUL, CE, CB, FCC, TUV T-mark, RoHS2
> HBU32-105	11 ~ 13 VDC	2.72 ~ 2.31 A	5%	30W	UL/cUL, CE, CB, FCC, TUV T-mark, RoHS2
> HBU32-106	13 ~ 16 VDC	2.31 ~ 1.88 A	5%	30W	UL/cUL, CE, CB, FCC, TUV T-mark, RoHS2
> HBU32-107	16 ~ 21 VDC	1.88 ~ 1.43 A	5%	30W	UL/cUL, CE, CB, FCC, TUV T-mark, RoHS2
> HBU32-108	21 ~ 27 VDC	1.43 ~ 1.12 A	3%	30W	UL/cUL, CE, CB, FCC, TUV T-mark, RoHS2
> HBU32-109	27 ~ 33 VDC	1.12 ~ 0.91 A	3%	30W	UL/cUL, CE, CB, FCC, TUV T-mark, RoHS2
> HBU32-110	33 ~ 40 VDC	0.91 ~ 0.76 A	3%	30W	UL/cUL, CE, CB, FCC, TUV T-mark, RoHS2