

FEATURES

- ▶ Standard SIP-7 Package
- ▶ Semi-regulated Output Voltage
- ▶ High Efficiency to 88.5%
- ▶ I/O-isolation 1000VDC
- ▶ Operating Temp. Range -40°C to +85°C
- ▶ CSA/IEC/EN 60950-1 Safety Approval
- ▶ Industry Standard Pinout
- ▶ 3 Years Product Warranty

NEW

PRODUCT OVERVIEW

The MINMAX MA01 series is a new range of isolated 1W DC/DC converter modules in a small SIP-package. There are 24 models available with 5V, 12V or 24VDC input and single-or dual-output voltages. These products provide have a typical load regulation of 2.5% to 5.0% depending on model.

The MA01 DC/DC converters are a compromise between a more expensive fully regulated converter and a non-regulated converter. They offer the designer a new solution for many cost critical applications where the output voltage variation has to be kept in a certain limit under all load conditions.

Model Selection Guide

Model Number	Input Voltage (Range) VDC	Output Voltage VDC	Output Current		Input Current		Load Regulation % (max.)	Reflected Ripple mA(typ.)	Max. capacitive Load uF	Efficiency (typ.)	
			Max.	Min.	@Max. Load	@No Load				@Max. Load	
			mA	mA	mA(typ.)	mA(typ.)				%	
MA01-05S05	5 (4.5 ~ 5.5)	5	200	4	238	30	6.5	7	220	84	
MA01-05S09		9	110	2	228		5			87	
MA01-05S12		12	84	1.5	232		5.2			87	
MA01-05S15		15	67	1	230		5			87.5	
MA01-05D05		±5	±100	±2	237		5.2			100#	84.5
MA01-05D09		±9	±56	±1	234		4.2				86
MA01-05D12		±12	±42	±0.8	233		4.6				86.5
MA01-05D15		±15	±34	±0.7	236		4.5				86.5
MA01-12S05		12 (10.8 ~ 13.2)	5	200	4		99			12	5
MA01-12S09	9		110	2	95	3.4	86.5				
MA01-12S12	12		84	1.5	95	3.4	88.5				
MA01-12S15	15		67	1	95	2.7	88				
MA01-12D05	±5		±100	±2	99	3.9	100#	84.5			
MA01-12D09	±9		±56	±1	98	2.8		86			
MA01-12D12	±12		±42	±0.8	95	2.9		88.5			
MA01-12D15	±15		±34	±0.7	94	2.6		87.5			
MA04-24S05	24 (21.6 ~ 26.4)		5	200	4	50	11	3.7	8		220
MA01-24S09		9	110	2	48	2.5		86.5			
MA01-24S12		12	84	1.5	48	2.4		87.5			
MA01-24S15		15	67	1	48	2.3		87.5			
MA01-24D05		±5	±100	±2	50	3.7		100#		83.5	
MA01-24D09		±9	±56	±1	49	2.5				86	
MA01-24D12		±12	±42	±0.8	48	2.4				87	
MA01-24D15		±15	±34	±0.7	49	2.3				87	

For each output

Input Specifications

Parameter	Model	Min.	Typ.	Max.	Unit
Input Surge Voltage (1 sec. max.)	5V Input Models	-0.7	---	9	VDC
	12V Input Models	-0.7	---	18	
	24V Input Models	-0.7	---	30	
Input Voltage Range	5V Input Models	4.5	5	5.5	VDC
	12V Input Models	10.8	12	13.2	
	24V Input Models	21.6	24	26.4	
Reverse Polarity Input Current	All Models	---	---	0.3	A
Input Filter		Internal Capacitor			
Internal Power Dissipation		---	---	450	mW

Output Specifications

Parameter	Conditions	Min.	Typ.	Max.	Unit
Output Voltage Balance	Dual Output, Balanced Loads	---	±0.1	±1.0	%
Line Regulation	For Vin Change of 1%	---	±1.05	±1.2	%
Load Regulation	Io=20% to 100%	See Model Selection Guide			
Ripple & Noise (20MHz)		---	30	60	mV _{P-P}
Temperature Coefficient		---	±0.01	±0.02	%/°C
Short Circuit Protection	0.5 Second Max.				

General Specifications

Parameter	Conditions	Min.	Typ.	Max.	Unit
I/O Isolation Voltage (rated)	60 Seconds	1000	---	---	VDC
I/O Isolation Resistance	500 VDC	1000	---	---	MΩ
I/O Isolation Capacitance	100KHz, 1V	40	60	120	pF
Switching Frequency		50	100	120	KHz
MTBF (calculated)	MIL-HDBK-217F@25°C, Ground Benign	2,000,000	---	---	Hours
Safety Approvals	CSA 60950-1 recognition, IEC/EN 60950-1(CB-scheme)				


Input Fuse

5V Input Models	12V Input Models	24V Input Models
500mA Slow-Blow Type	200mA Slow-Blow Type	100mA Slow-Blow Type


Environmental Specifications

Parameter	Conditions	Min.	Max.	Unit
Operating Temperature Range (without Derating)	Ambient	-40	+85	°C
Case Temperature		---	+95	°C
Storage Temperature Range		-50	+125	°C
Humidity (non condensing)		---	95	% rel. H
Cooling	Free-Air convection			
Lead Temperature (1.5mm from case for 10Sec.)		---	260	°C

Power Derating Curve

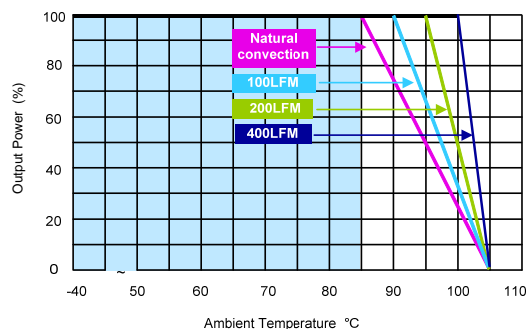

Output Voltage Tolerance

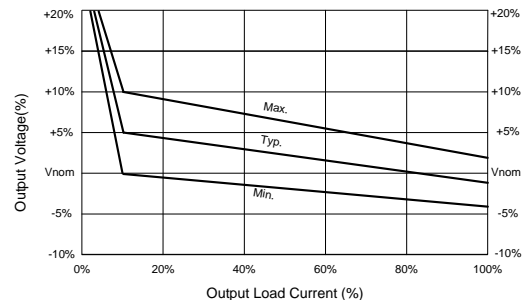


Notes

- Specifications typical at Ta=+25°C, resistive load, nominal input voltage and rated output current unless otherwise noted.
- Ripple & Noise measurement bandwidth is 0-20MHz.
- These power converters require a minimum output loading to maintain specified regulation, operation under no-load conditions will not damage these modules; however they may not meet all specifications listed.
- All DC/DC converters should be externally fused at the front end for protection.
- Other input and output voltage may be available, please contact factory.
- Specifications subject to change without notice.

Package Specifications

Mechanical Dimensions

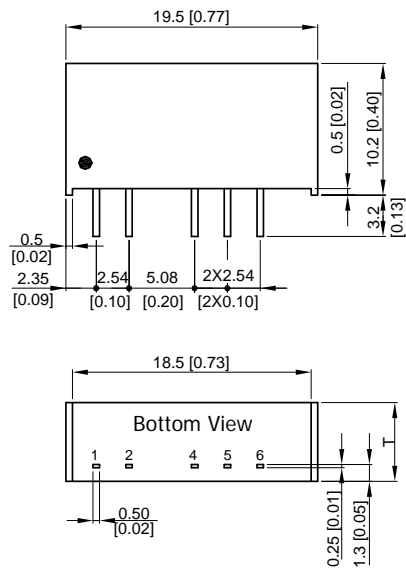

Pin Connections

Pin	Single Output	Dual Output
1	+Vin	+Vin
2	-Vin	-Vin
4	-Vout	-Vout
5	No Pin	Common
6	+Vout	+Vout

T=6.1[0.24] for 5V & 12V Input Models

T=7.1[0.28] for 24V Input Models

- ▶ All dimensions in mm (inches)
- ▶ Tolerance: X.X±0.25 (X.XX±0.01)
X.XX±0.13 (X.XXX±0.005)
- ▶ Pins ±0.05(±0.002)

Physical Characteristics

Case Size (5&12V Input) : 19.5x6.1x10.2mm (0.77x0.24x0.40 Inches)

Case Size (24V Input) : 19.5x7.1x10.2mm (0.77x0.28x0.40 Inches)

Case Material : Non-Conductive Black Plastic (flammability to UL 94V-0 rated)

Weight (5&12V Input) : 2.2g


Weight (24V Input) : 2.6g

Test Configurations

Input Reflected-Ripple Current Test Setup



Input reflected-ripple current is measured with an inductor L_{in} (10uH) and C_{in} (1uF, ESR < 1.0Ω at 100 KHz) to simulate source impedance. Capacitor C_{in} , offsets possible battery impedance.

Current ripple is measured at the input terminals of the module, measurement bandwidth is 0-500 KHz.

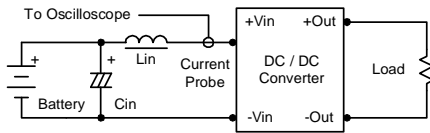

Peak-to-Peak Output Noise Measurement Test

Use a C_{out} 0.33uF ceramic capacitor. Scope measurement should be made by using a BNC socket, measurement bandwidth is 0-20 MHz. Position the load between 50 mm and 75 mm from the DC/DC Converter.

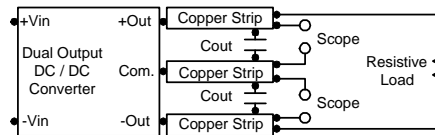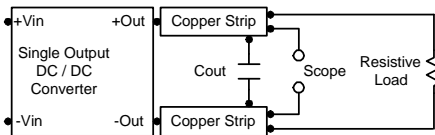


Design & Feature Considerations

Maximum Capacitive Load

The MA01 series has limitation of maximum connected capacitance at the output. The power module may be operated in current limiting mode during start-up, affecting the ramp-up and the startup time. For optimum performance we recommend 100uF maximum capacitive load for dual outputs and 220uF capacitive load for single outputs. The maximum capacitance can be found in the data sheet.



Input Source Impedance

The power module should be connected to a low ac-impedance input source. Highly inductive source impedances can affect the stability of the power module. In applications where power is supplied over long lines and output loading is high, it may be necessary to use a capacitor at the input to ensure startup. Capacitor mounted close to the power module helps ensure stability of the unit, it is commended to use a good quality low Equivalent Series Resistance (ESR < 1.0Ω at 100 KHz) capacitor of a 2.2uF for the 5V input devices, a 1.0uF for the 12V input devices and a 0.47uF for the 24V devices.

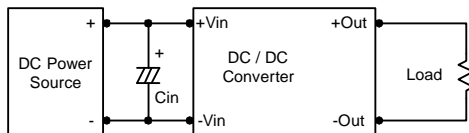

Output Ripple Reduction

A good quality low ESR capacitor placed as close as practicable across the load will give the best ripple and noise performance. To reduce output ripple, it is recommended to use 1.0uF capacitors at the output.

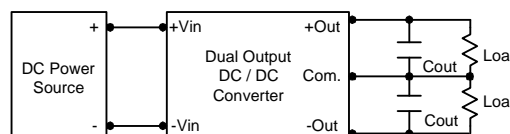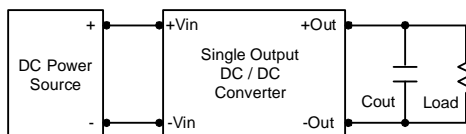

Thermal Considerations

Many conditions affect the thermal performance of the power module, such as orientation, airflow over the module and board spacing. To avoid exceeding the maximum temperature rating of the components inside the power module, the case temperature must be kept below 95°C. The derating curves are determined from measurements obtained in a test setup.

