

FEATURES

- ▶ Highest Power Density
- ▶ 1" x 1" x 0.4" Shielded Metal Package
- ▶ Wide 2:1 Input Range
- ▶ Excellent Efficiency up to 90%
- ▶ Operating Temp. Range -40°C to +80°C
- ▶ Optional Heatsink
- ▶ I/O-isolation Voltage 1500VDC
- ▶ Remote On/Off Control
- ▶ Over Load Protection
- ▶ 3 Year Product Warranty




PRODUCT OVERVIEW

The MINMAX MJW25 series is the latest range of a new generation of high performance dc-dc converter modules with very high power density. The product offers fully 25W in a shielded metal package with dimensions of just 1.0"x1.0"x0.4". All models provide wide 2:1 input range and tightly regulated output voltage. State-of-the-art circuit topology provides a very high efficiency up to 90% which allows an operating temperature range of -40°C to +80°C. These converters are qualified for demanding applications in battery operated equipment, instrumentation, data communication, industrial and many other space critical applications.

Model Selection Guide

Model Number	Input Voltage (Range)	Output Voltage	Output Current		Input Current		Reflected Ripple Current	Over Voltage Protection	Max. capacitive Load	Efficiency (typ.)
			Max.	@Max. Load	@No Load	@Max. Load				
	VDC	VDC	mA	mA (typ.)	mA (typ.)	mA (typ.)	VDC	μF	%	
MJW25-12S033	12 (9 ~ 18)	3.3	6000	1900	100	80	3.9	10300	87	
MJW25-12S05		5	5000	2340	100		6.2	6800	89	
MJW25-12S12		12	2090	2340	80		15	1200	89	
MJW25-12S15		15	1670	2350	80		18	750	89	
MJW25-12D12		±12	±1040	2340	45		±15	680#	89	
MJW25-12D15		±15	±840	2340	45		±18	380#	89	
MJW25-24S033	24 (18 ~ 36)	3.3	6000	940	80	50	3.9	10300	88	
MJW25-24S05		5	5000	1160	80		6.2	6800	90	
MJW25-24S12		12	2090	1160	65		15	1200	90	
MJW25-24S15		15	1670	1160	65		18	750	90	
MJW25-24D12		±12	±1040	1170	35		±15	680#	89	
MJW25-24D15		±15	±840	1170	35		±18	380#	89	
MJW25-48S033	48 (36 ~ 75)	3.3	6000	470	45	30	3.9	10300	88	
MJW25-48S05		5	5000	580	45		6.2	6800	90	
MJW25-48S12		12	2090	580	35		15	1200	90	
MJW25-48S15		15	1670	580	35		18	750	90	
MJW25-48D12		±12	±1040	590	25		±15	680#	89	
MJW25-48D15		±15	±840	590	25		±18	380#	89	

For each output

Input Specifications

Parameter	Model	Min.	Typ.	Max.	Unit	
Input Surge Voltage (100ms max.)	12V Input Models	-0.7	---	25	VDC	
	24V Input Models	-0.7	---	50		
	48V Input Models	-0.7	---	100		
Start-Up Threshold Voltage	12V Input Models	---	---	9	VDC	
	24V Input Models	---	---	18		
	48V Input Models	---	---	36		
Input Polarity Protection	None					
Start Up Time	Power Up	Nominal Vin and Constant Resistive Load	---	---	30	ms
	Remote On/Off		---	---	30	ms
Internal Filter Type	All Models	LC Filter (for EN55022, Class A or Class B compliance see note 7)				
Short Circuit Current	Hiccup Mode, 1.5 Hz typ.					

Output Specifications

Parameter	Conditions	Min.	Typ.	Max.	Unit	
Output Voltage Setting Accuracy	At 50% Load	---	±1.0	---	%Vnom.	
Output Voltage Balance	Dual Output, Balanced Loads	---	±2.0	---	%	
Line Regulation	Vin=Min. to Max.	---	±0.2	---	%	
Load Regulation	No Load to Full Load	Single Output	---	±0.2	---	%
		Dual Output	---	±1.0	---	%
Cross Regulation (Dual)	Asymmetrical load 25% / 100% FL	---	±5.0	---	%	
Min. Load	No minimum Load Requirement					
Ripple & Noise (20MHz)	3.3V & 5V Models	---	75	---	mV _{P-P}	
Ripple & Noise (20MHz)	12V, 15V & Dual Models	---	100	---	mV _{P-P}	
Transient Recovery Time	25% Load Step Change	---	300	---	µsec	
Temperature Coefficient		---	---	±0.02	%/°C	
Over Load Protection	Current Limitation at 150% typ. of Iout max., Hiccup					
Short Circuit Protection	Hiccup Automatic Recovery					
Over Voltage Protection	For Shutdown Voltage see Model Selection Guide					

General Specifications

Parameter	Conditions	Min.	Typ.	Max.	Unit
I/O Isolation Voltage (rated)	60 Seconds	1500	---	---	VDC
I/O Isolation Resistance	500 VDC	1000	---	---	MΩ
I/O Isolation Capacitance	100KHz, 1V	---	---	1500	pF
Switching Frequency		---	330	---	KHz
MTBF(calculated)	MIL-HDBK-217F@25°C, Ground Benign	TBD	---	---	Hours
Safety Approvals(pending)	UL/cUL 60950-1 recognition(CSA certificate), IEC/EN 60950-1(CB-scheme)				

Input Fuse

12V Input Models	24V Input Models	48V Input Models
400mA Slow-Blow Type	2000mA Slow-Blow Type	1000mA Slow-Blow Type

Remote On/Off Control

Parameter	Conditions	Min.	Typ.	Max.	Unit
Converter On	3.5V ~ 12V or Open Circuit				
Converter Off	0V ~ 1.2V or Short Circuit				
Control Input Current (on)	Vctrl = 5.0V	---	---	0.5	mA
Control Input Current (off)	Vctrl = 0V	---	---	-0.5	mA
Control Common	Referenced to Negative Input				
Standby Input Current	Supply Off & Nominal Vin	---	10	---	mA

Output Voltage Trim


Parameter	Conditions	Min.	Typ.	Max.	Unit
Trim Up / Down Range	% of nominal output voltage	±10	---	---	%

Environmental Specifications


Parameter	Model	Min.	Max.	Unit
			without Heatsink	
Operating Ambient Temperature Range (see Power Derating Curves)	Natural Convection	-40	+80	°C
Thermal Impedance	Natural Convection without Heatsink	17.6	---	°C/W
	Natural Convection with Heatsink	14.8	---	°C/W
	100LFM Convection without Heatsink	13.6	---	°C/W
	100LFM Convection with Heatsink	8.5	---	°C/W
	200LFM Convection without Heatsink	11.8	---	°C/W
	200LFM Convection with Heatsink	6.5	---	°C/W
	400LFM Convection without Heatsink	8.8	---	°C/W
400LFM Convection with Heatsink	4.3	---	°C/W	
Case Temperature		---	+105	°C
Storage Temperature Range		-50	+125	°C
Humidity (non condensing)		---	95	% rel. H
Cooling	Free-Air convection			
RFI	Six-Sided Shielded, Metal Case			
Lead Temperature (1.5mm from case for 10Sec.)		---	260	°C

EMC Specifications


Parameter	Standards & Level	Performance
EMI	EN55022	Class A /Class B (see Note 7)
ESD	EN61000-4-2 air ± 8KV , Contact ± 6KV	Perf. Criteria A
Radiated immunity	EN61000-4-3 10 V/m	Perf. Criteria A
Fast transient (see Note 8)	EN61000-4-4 ± 2KV	Perf. Criteria A
Surge (see Note 8)	EN61000-4-5 ± 2KV	Perf. Criteria A
Conducted immunity	EN61000-4-6 10 V/m	Perf. Criteria A

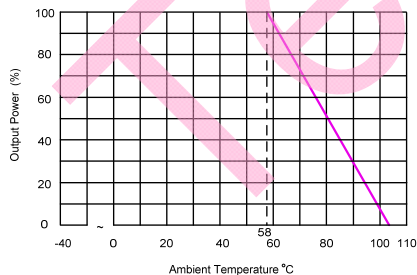Power Derating Curve


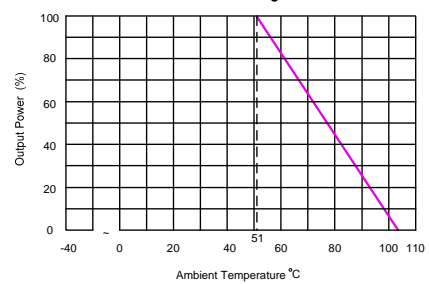
MJW25-24S033, MJW25-48S033
Derating Curve without Heatsink

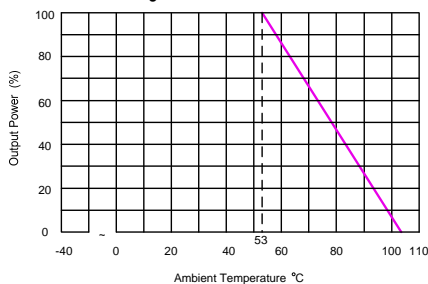


MJW25-12S033 Derating Curve without Heatsink

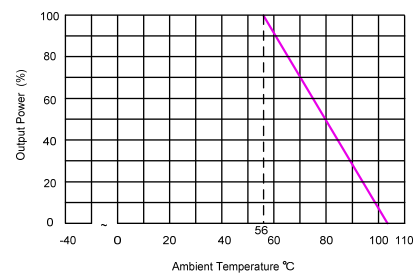

MJW25-24S05, MJW25-24S12, MJW25-24S15, MJW25-48S05
MJW25-48S12, MJW25-48S15 Derating Curve without Heatsink




MJW25-12S05, MJW25-12S12, MJW25-12S15, MJW25-12D12
MJW25-12D15, MJW25-24D12, MJW25-24D15, MJW25-48D12, MJW25-48D15
Derating Curve without Heatsink

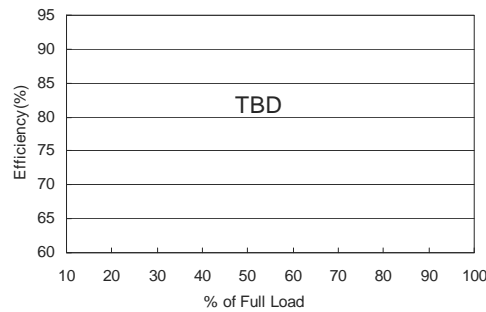Efficiency Curve @25°C


MJW25-XXXXX Efficiency vs Load Current

Notes

- 1 Specifications typical at Ta=+25°C, resistive load, nominal input voltage, rated output current unless otherwise noted.
- 2 Transient recovery time is measured to within 1% error band for a step change in output load of 75% to 100%.
- 3 Ripple & Noise measurement bandwidth is 20 MHz, measured with a 1µF MLCC and a 10µF Tantalum Capacitor.
- 4 All DC/DC converters should be externally fused at the front end for protection.
- 5 Other input and output voltage may be available, please contact factory.
- 6 To order the converter with heatsink, please add a suffix -HS (e.g. MJW25-24S05-HS) to order code.
- 7 The MJW25 series can meet EN55022, Class A by adding a capacitor across the input pins. Suggested capacitor: TBD
To meet Class B following additional external filter is suggested: TBD
- 8 The MJW25 series can meet EN61000-4-4 & EN61000-4-5 by adding a capacitor across the input pins. Suggested capacitor: TBD
- 9 That "natural convection" is about 20LFM but is not equal to still air (0 LFM).
- 10 Specifications are subject to change without notice.

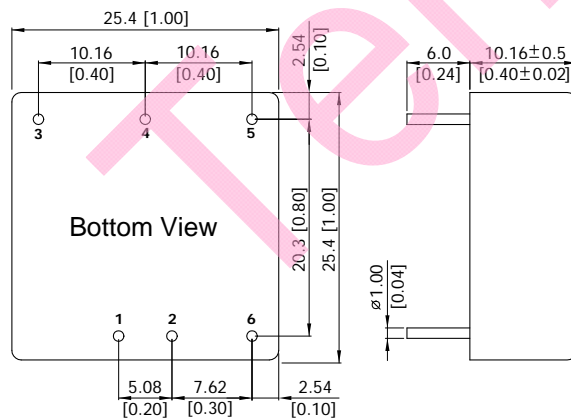Package Specifications
Mechanical Dimensions

Pin Connections

Pin	Single Output	Dual Output
1	+Vin	+Vin
2	-Vin	-Vin
3	+Vout	+Vout
4	Trim	Common
5	-Vout	-Vout
6	Remote On/Off	Remote On/Off


- ▶ All dimensions in mm (inches)
- ▶ Tolerance: X.X±0.25 (X.XX±0.01)
X.XX±0.13 (X.XXX±0.005)
- ▶ Pin diameter $\varnothing 1.0 \pm 0.05$ (0.04±0.002)

Physical Characteristics

Case Size	: 25.4x25.4x10.16mm (1.0x1.0x0.4 Inches)
Case Material	: Aluminium Alloy, Black Anodized Coating
Base Material	: FR4 PCB (flammability to UL 94V-0 rated)
Pin Material	: Copper Alloy with Gold Plate Over Nickel Subplate
Weight	: TBD

Heatsink (Option –HS)

Mechanical Dimensions

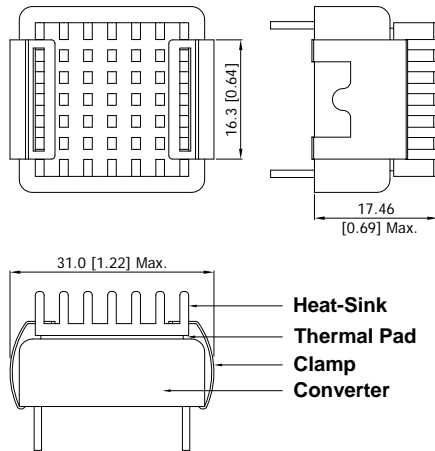


Heatsink Material: Aluminum
 Finish: Anodic treatment (black)
 Weight: 2g

► The advantages of adding a heatsink are:

1. To help heat dissipation and increase the stability and reliability of DC/DC converters at high operating temperature atmosphere.
2. To upgrade the operating temperature of DC/DC converters, please refer to Derating Curve.

External Output Trimming


Output can be externally trimmed by using the method shown below

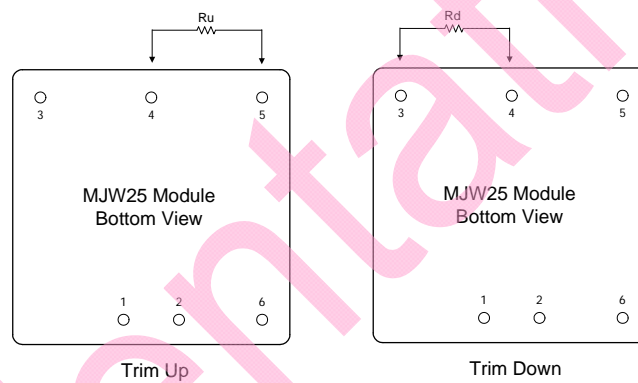

Test Setup


Input Reflected-Ripple Current Test Setup

Input reflected-ripple current is measured with an inductor L_{in} (4.7 μ H) and C_{in} (220 μ F, ESR < 1.0 Ω at 100 KHz) to simulate source impedance. Capacitor C_{in} , offsets possible battery impedance. Current ripple is measured at the input terminals of the module, measurement bandwidth is 0-500 KHz.

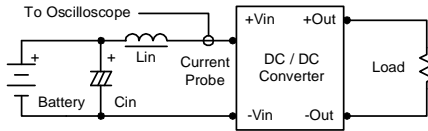

Peak-to-Peak Output Noise Measurement Test

Use a 1 μ F ceramic capacitor and a 10 μ F tantalum capacitor. Scope measurement should be made by using a BNC socket, measurement bandwidth is 0-20 MHz. Position the load between 50 mm and 75 mm from the DC/DC Converter.

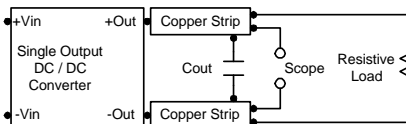

Technical Notes

Remote On/Off

Positive logic remote on/off turns the module on during a logic high voltage on the remote on/off pin, and off during a logic low. To turn the power module on and off, the user must supply a switch to control the voltage between the on/off terminal and the -Vin terminal. The switch can be an open collector or equivalent. A logic low is 0V to 1.2V. A logic high is 3.5V to 12V. The maximum sink current at the on/off terminal (Pin 6) during a logic low is -500 μ A. The maximum allowable leakage current of a switch connected to the on/off terminal (Pin 6) at logic high (3.5V to 12V) is 10mA.

Overcurrent Protection


To provide hiccup mode protection in a fault (output overload) condition, the unit is equipped with internal current limiting circuitry and can endure overload for an unlimited duration.

Overvoltage Protection

The output overvoltage clamp consists of control circuitry, which is independent of the primary regulation loop, that monitors the voltage on the output terminals. The control loop of the clamp has a higher voltage set point than the primary loop. This provides a redundant voltage control that reduces the risk of output overvoltage. The OVP level can be found in the output data.


Input Source Impedance

The power module should be connected to a low ac-impedance input source. Highly inductive source impedances can affect the stability of the power module. In applications where power is supplied over long lines and output loading is high, it may be necessary to use a capacitor at the input to ensure startup. Capacitor mounted close to the power module helps ensure stability of the unit, it is recommended to use a good quality low Equivalent Series Resistance (ESR < 1.0 Ω at 100 KHz) capacitor of a 10 μ F for the 24V and 48V devices.

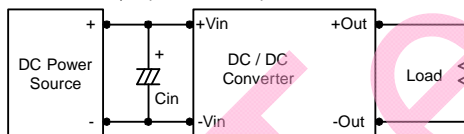

Output Ripple Reduction

A good quality low ESR capacitor placed as close as practicable across the load will give the best ripple and noise performance. To reduce output ripple, it is recommended to use 4.7 μ F capacitors at the output.

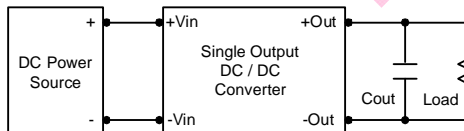

Maximum Capacitive Load

The MJW25 series has limitation of maximum connected capacitance at the output. The power module may be operated in current limiting mode during start-up, affecting the ramp-up and the startup time. The maximum capacitance can be found in the data sheet.

Thermal Considerations

Many conditions affect the thermal performance of the power module, such as orientation, airflow over the module and board spacing. To avoid exceeding the maximum temperature rating of the components inside the power module, the case temperature must be kept below 105°C. The derating curves are determined from measurements obtained in a test setup.

